
CleanStep™ 896 Nylon Carpet Tile







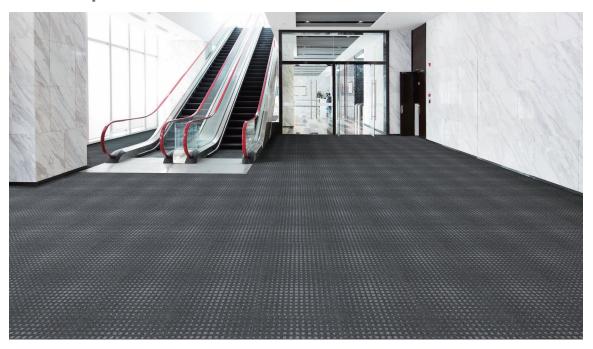

Improves Appearance

at Lower Maintenance Cost

CleanStep™ carpet tile installed at entrances reduces soiling in interior spaces, to improve aesthetics and lower periodic cleaning costs.



Extends

Flooring Life

CleanStep™ minimizes the volume of dirt and moisture that enters the building, to reduce abrasive wear and extend the life of interior flooring.



St<u>ylish</u>

Entrance Solution

CleanStep's contemporary embossed-grid pattern complements upscale lobbies.



Safer

than Loose Mats

CleanStep™ carpet tile can be fully adhered to the floor, to eliminate the trip hazard associated with loose mats that can wrinkle and buckle.

Fiber System

100% BCF Solution Dyed Nylon

Pile Weight

24 oz/SY 815 g/m²

Gauge

1/12th 2.1 mm

Density

7500

Size & Packaging

Tile Size

19.7" x 19.7" (50 cm x 50 cm)

Carton

20 tiles per carton = 6 SY = 5 m² 32 cartons per pallet

Sustainability

- · CRI Green Label Plus
- 100% PVC-Free
- Up to 20% pre-consumer recycled content

European Spec Backing

PVC-Free, Four-Layers:

- 1. Non-Woven Primary Layer
 - Strong Edges
- 2. Advanced Polymer Pre-Coat
 - Superior Tuft Lock
- 3. Modified Bitumen Core
 - Stability in Heavy Traffic
- 4. Polyester Felt Back
 - Reliable Adhesion

Testing

Flammability Class I (ASTM E648) Bfl-s1 (EN13051-1) Static <2 kV (AATCC 134)

Usage Classification 33 (EN1307)

Warranties

Lifetime Backing Performance Lifetime Commercial Wear

See full warranty text at nextfloor.net

Installation Methods



Quarter-Turn

Recommended Adhesive

Next 1200™ 4GAL

4 gallon pail (34 pounds) 48 pails per pallet

Sample SKUS

Folders

2P896NF

20 folders per carton (44 lbs)

Handle Board

HB896NF

5 boards per carton (38 lbs)



