

Notting Hill 629 Nine-Layer Engineered Wood



Species

European Oak, Hickory

Large Planks

Random lengths up to 75", premium sort:

Over 50% of floor area is 75" boards

Thickness: $\frac{3}{4}$ " (nominal) 18 mm

Width: $7\frac{1}{2}$ " (nominal) 19 cm

Structure

Nine-layer engineered wood

(Acacia core layers)

3 mm sawn Oak or Hickory face layer

Wire Brush Finish

Four-sided beveled edge

Low luster gloss level

UV-cured polyurethane with aluminum oxide

Installation

T&G joint; stapled, glued, or floated

Oak colors compatible with hydronic heating

Packaging

6 layers per carton (57 lbs)

23.31 SF per carton

40 cartons per pallet

22 pallets per 40 HQ container (Dalton)

24 pallets per 40 HQ container (Ontario)

Certification

Floor Score Certified

Warranties

35-Year Residential Wear

Lifetime Structural

See full warranty text at nextfloor.net

Coordinating Moldings

Stair Nose, Reducer, and T-mold available

See more details at nextfloor.net

Sample SKUs

Strap Sets

SS629NF

5 per carton (54 lbs)

Display

7CARDS629NF-1


7CARDS629NF-2

7CARDS629NF-3

FIXT629NF

Packaged in 3 cartons (146 lbs)

$\frac{3}{4}$ " is ideal beside:
tile over $\frac{1}{4}$ " underlayment

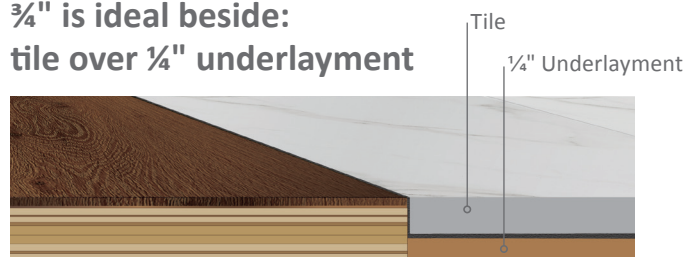

Beautiful Sawn Hardwood

- Millbrook Timbers engineered wood floors are made with classic finishing techniques.
Beautiful natural wood textures are enhanced with light wire brushing, refined edge bevels, and multiple rich stains.
- Thick 3 mm European oak or hickory face.
- Durable aluminum oxide finish **resists scratches** and stays beautiful for a lifetime.

Large Luxurious Planks

Wide Planks
7½" width

Six Foot Planks
Long random lengths up to 75"

Premium Sort
Over 50% of floor area is 75" boards



Corner Cuts

- To show the nine layers of sturdy engineered wood



¾" Thick, Simply the Best

- Notting Hill features an extra-thick ¾" nine-layer construction:
 - Guaranteed for a lifetime of heavy residential use.
 - Built to last for many generations.
 - More durable and stable than thinner hardwood floors, **even in changing temperature and humidity.**
- The top hardwood layer is very thick (3 mm):
 - Thick enough to be refinished multiple times (e.g. to change the stain color when redecorating).
- The ¾" thickness creates beautiful, level transitions where hardwood meets tile flooring (when tile is installed over ¼" underlayment).

