
Center Point 464 Extra Heavy Commercial Traffic





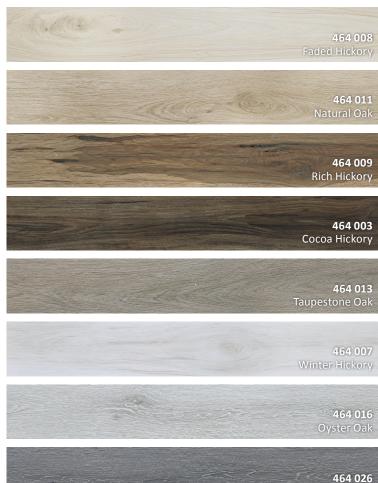

ASTM E648 Class I

DOC FF 1-70 Passed

0.73

exceeds 3000 lbs

ASTM 2047

ASTM F970

ASTM E492 64

ASTM E989 71

Size

6" x 48" nominal (15.3 cm x 122 cm) 3.2 mm thick

Abrasion Class

AC5 - Heavy Commercial Traffic

Edge Treatment

Four-Sided Color-Enhanced Bevel

Installation

- Tongue & Groove
- Recommended Adhesive: NEXT 1200[™] (mandatory for warranty)

Packaging

15 pieces per carton (43 lbs) 30.14 SF per carton 50 cartons per pallet 20 pallets per container

Coordinating Moldings

See nextfloor.net for more details.

Testing

Critical Radiant Flux

Surface Flammability Coefficient of Friction Static Load Limit Sound Transmission Class (STC) Impact Isulation Class (IIC) High Frequency Impact Isulation Class(HIIC) ASTM E3222 89 Floor Score Certified

Phthalate Free 100% Virgin PVC

Warranties

Lifetime Waterproof 30-Year Commercial Wear 10-Year Scratch Resistance 10-Year Stain Resistance Lifetime Residential Wear 10-Year Residential Pet Scratch Resistance

See full warranty text at nextfloor.net

Sample SKUs

Folders 3P464NF 20 per carton (110 lb)

Handle Boards HB464NF 5 per carton (60 lb)

Strap Set SS464NF 5 per carton (55 lb)

Mandatory Adhesive

Next 1200[™]- 1GAL 1 gallon pail (9 pounds) 180 pails per pallet

Next 1200[™]- 1GAL 4 gallon pail (34 pounds) 48 pails per pallet







Tongue & Groove Glue-Down Planks

- Superior scratch & indentation resistance
- AC5 extra heavy commercial rating
- For matching click-together floating floor, see
 Style 562 Lighthouse Point



Resists Scratches

ScratchMaster® meets the demanding industry standard:

AC5 Heavy Commercial Traffic



Resists Stains

Stain Resistance Warranty

Even most "permanent" marker lines wipe right off.



Resists Burns

ScratchMaster® floors feature an innovative high-melting-point surface. They are highly resistant to cigarette and other accidental burns.



Waterproof

ScratchMaster® floors are ideal for kitchens, bath and laundry rooms, anywhere that moisture is a concern. Not affected by spills or moisture



